

An inexpensive jib which gives longer reach capabilities for picking up a product which is difficult to palletise or for handling motors, press tools etc. from positions which are hard to access.

Supplied with hook and shackle which can be moved to any suitable lifting position




Model Ref	Lifting Capacity (kg) at Load Centre (mm)						
	Minimum Truck Capacity (kg)	500	750	1000	1250	1500	1750
500-0.8	1000	800	630	500	380	310	230
500-1.0	1300	1000	800	630	470	380	280
500-1.3	1500	1300	900	680	500	450	380
500-1.8	2000	1800	1400	1100	900	720	580
500-2.2	2500	2200	1700	1400	1100	1000	830
500-2.7	3000	2700	1900	1450	1200	1100	900
500-3.1	3500	3100	2400	1900	1500	1200	1000
500-3.5	4000	3500	2700	2000	1600	1300	1100
500-4.4	5000	4400	3400	2700	2200	1850	1400

Features & Benefits

- Low profile design allows for better access into areas where space is limited
- Jib rated to suit the capacity of the lift truck, which helps to reduce wear & tear and possible overloading
- Multiple hook positions for flexible load handling whilst reducing handling costs
- Long jib arm helps reach otherwise inaccessible places
- Heel retaining pins ensures jib is safely secured to the forklift forks
- CE marked and supplied with certificate of conformity for health & safety regulations



Jib Dimensions

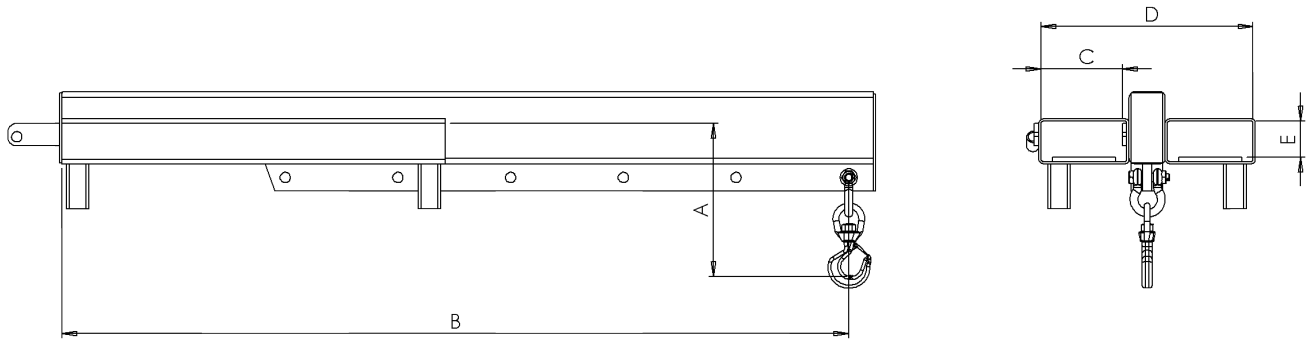

Model Ref	"A" Hook Height (mm)	"B" Last Hole (mm)	"C" Max Fork Width (mm)	"D" Fork Spread (mm)	"E" Max Fork Thickness (mm)	Weight (kg)
500-0.8	289	1750	130	360	55	125
500-1.0	289	1750	130	360	55	125
500-1.3	289	1750	130	360	55	125
500-1.8	339	1750	130	360	55	125
500-2.2	354	1750	130	360	55	127
500-2.7	354	1750	170	460	70	129
500-3.1	364	1750	170	460	70	129
500-3.5	414	1750	170	460	70	129
500-4.4	438	1750	170	460	70	186

