


## Block Clamp



- **Great safety** due to huge multiplication of 5:1.
- **Web sling** instead of chain/rope: light weight, no twisting, no injuries.
- Due to the **continuously adjustable suspension** also asymmetric elements can be handled in a horizontal position.
- The **narrow jaw** enables picking up of loads even when in confined spaces.
- Clamping jaws equipped with **rubber coating**.
- **Spring tension** prevents an inadvertent slipping down of the clamp.
- **Easy handling** by compact and convenient construction.
- Suitable for nearly **all materials**.

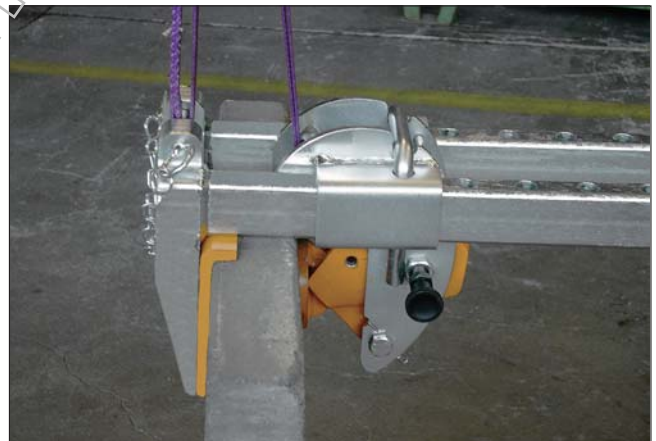

Order No.	Model	Carrying Capacity	Clamping Range	Weight
303 050	BZ 0.5-50	500 kg	10-500 mm	21 kg

Patent Application Made

**The clamp with the huge multiplication of 5:1 for the safe transport**