


Floor Socket

Floor mount socket for use with the Aluminium Davit.

Three versions available: zinc-plated steel, stainless steel or aluminium.

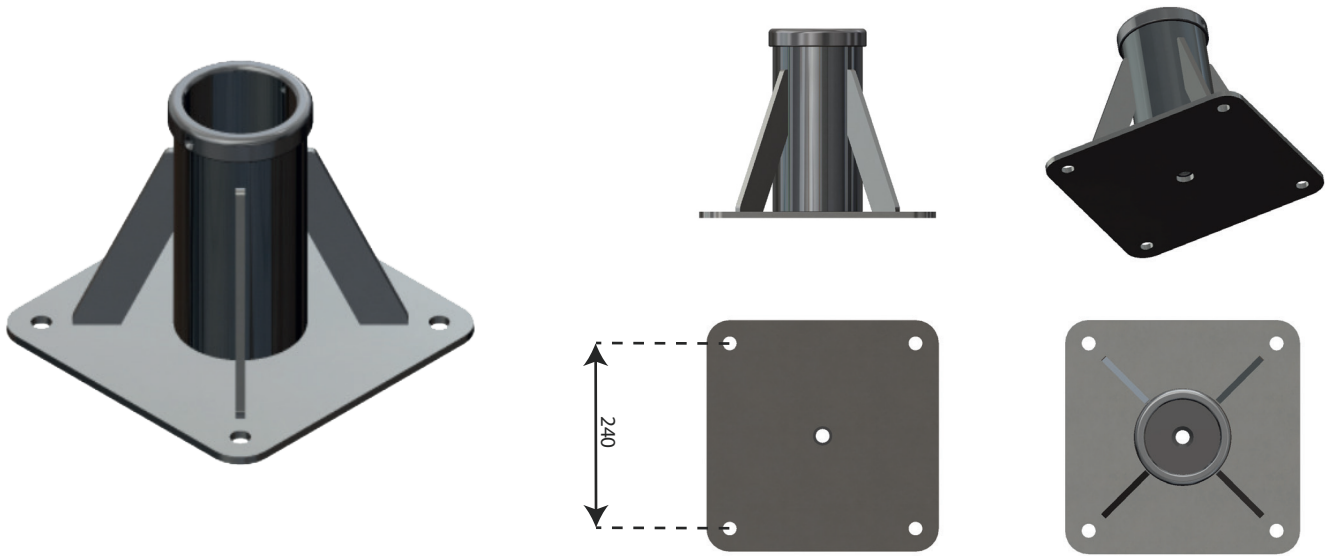

- ◆ Suits D200-60 and D200-80 G.Davit models
- ◆ Certified for lifting personnel and loads
- ◆ Includes socket cap with lanyard
- ◆ Includes internal sleeve / liner
- ◆ Uses M16 bolts
- ◆ Pull out strength requirement for each bolt = 7,120 Nm minimum
- ◆ Distance between bolt centres = 240mm

2006/42/EC

EN795

TS16415



**NEW PRODUCT
2018**

Personnel MWL	200kg
Loads MWL	250kg



01767 312125



sales@angliahandling.co.uk



www.angliahandling.co.uk