


RANGE OF MANUAL CHAIN HOISTS


Complete range:

- WLL 0.250 to 20 tonnes
- Hooks with 360° swivel
- Automatic brake with double pawl system
- Tested to 150% of WLL
- Self-lubricating chain, corrosion resistant, made to standard NFE 26-010 (resists marine mists >800 h. and temperatures to 280° C.)
- Optional load limiter


In accordance with: **CE**
 - Machinery Directive 98/37/CEE
 - European standard EN 292 (Safety equipment).

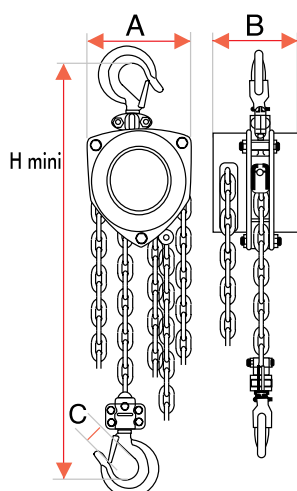

WLL 0.250 t to 2 t

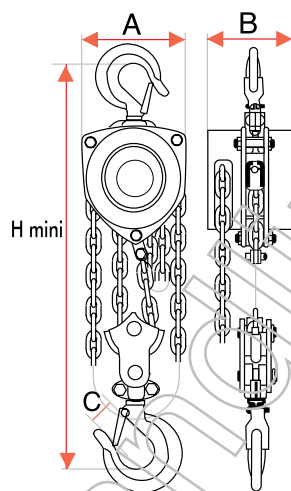

WLL 2 t to 5 t

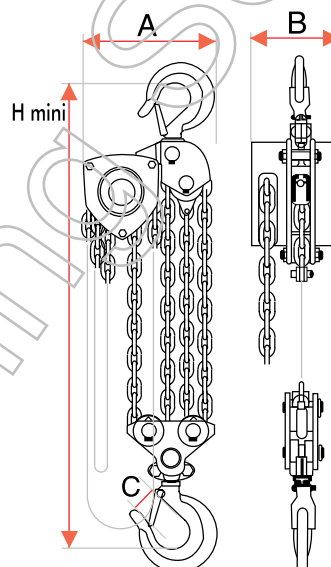

WLL 10 t

GENERAL SPECIFICATION

Model	WLL	Number of falls	Effort on hand chain (daN / kg)	Load chain (mm)	Hand chain (mm)	Hoist weight 3 m lift (kg)	Chain weight** extra per m (kg)	Dimensions			
								A (mm)	B (mm)	C (mm)	H mini (mm)
250	250 kg	1	11	4 x 12	5 x 24	4	0,54	100	110	18	230
500	500 kg	1	21	5 x 15	5 x 24	9	1,5	132	112	23	340
1000	1000 kg	1	34	6 x 18	5 x 24	12	1,7	156	134	27	390
1500	1500 kg	1	38	8 x 24	5 x 24	19	2,3	196	150	31	470
2000	2000 kg	2	36	6 x 18	5 x 24	18	2,5	156	134	35	530
2000	2000 kg	1	40	8 x 24	5 x 24	20	2,3	229	155	35	605
3000	3000 kg	2	42	8 x 24	5 x 24	28	3,7	196	150	39	630
5000	5000 kg	2	45	10 x 30	5 x 24	41	5,3	229	171	45	730
10 000	10.000 kg	4	47	10 x 30	5 x 24	79	9,7	395	171	57	920
20 000*	20.000 kg	8	50	10 x 30	5 x 24	178	19,4	642	200	75	1050

* - Model on request

** - Weight of load chain and hand chain per meter.