


CP-C4 Combined Chain Hoist and Trolleys

The Corrosion Protected Combined Chain Hoist with Push and Geared Trolleys meet and exceed the requirements of international standard and British Standard BS EN 13157:2004 + A1:2009.

Specifications

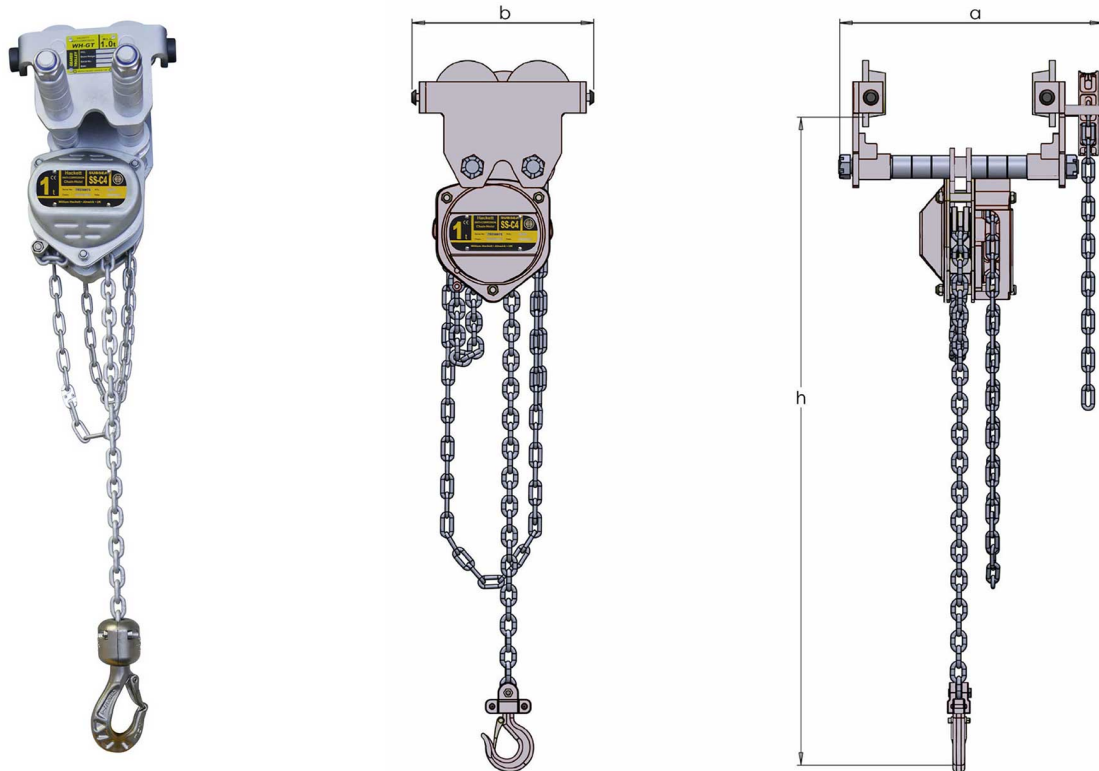

Part Code	WLL tonnes	No. of Falls	Beam Range 1 mm	Beam Range 2 mm	a max mm	b mm	h mm	Mass kg Range 1
066.050.CP	0.50	1	50 - 203	-	294	190	295	15.00
066.100.CP	1.00	1	64 - 203	64 - 305	311	206	305	22.00
066.200.CP	2.00	1	88 - 203	88 - 305	324	246	437	34.00

CP-C4 Combined Chain Hoist and Geared Trolley

Part Code	WLL tonnes	No. of Falls	Beam Range 1 mm	Beam Range 2 mm	a max mm	b mm	h mm	Mass kg Range 1
067.050.CP	0.50	1	50 - 203	-	232	190	295	15.60
067.100.CP	1.00	1	64 - 203	64 - 305	332	206	305	25.50
067.200.CP	2.00	1	88 - 203	88 - 305	341	246	437	37.50

