

Loadlink *plus*



250kg to 250t capacities



Rugged & weatherproof



Overload Counter




Audible setpoint alarm



Kg, Lbs, t & kN



Peak hold function

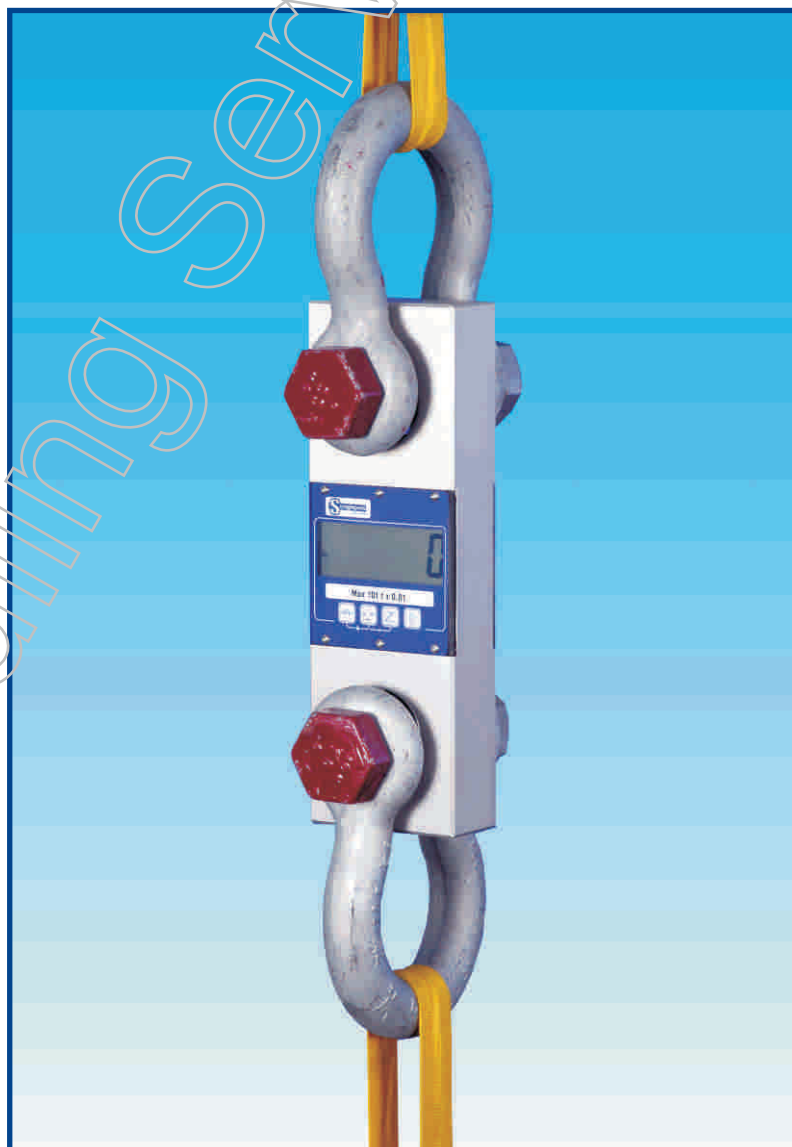

Specifications

Services Ltd


The original electronic force measurement device with integral display. In production since 1979, this is the latest version of this world renowned product.

All LLP's have push button control for: tare, units (kg, lbs, kN & tonnes), peak hold, pre-set tare, audible setpoint alarm and overload counter.

Remote output is fitted as standard allowing connection to our range of accessories.

All models are supplied with carry/storage case.

Part Number	LLP250KG	LLP500KG	LLP1T	LLP2T5	LLP5T	LLP10T
Capacity	250kg	500kg	1t	2.5t	5t	10t
Resolution	0.05kg	0.1kg	0.0005t	0.001t	0.001t	0.002t
Units	kg, kN, lbs	t, kg, kN, lbs	t, kg, kN, lbs	t, kg, kN, lbs	t, kg, kN, lbs	t, kg, kN, lbs
Weight	1.5kg	1.5kg	1.5kg	1.5kg	2.2kg	3.5kg
Safety Factor	50:1	25:1	12:1	5:1	5:1	6:1
Protection	IP65					
Battery Type	9v PP3					
Battery Life	80hrs continuous					
Display Type	25mm LCD					
Operating Temp	-10 to 50c					
Accuracy	+/- 0.3% of applied load					
Dimension A	204mm	204mm	204mm	204mm	249mm	305mm
Dimension B	43mm	43mm	43mm	43mm	43mm	47mm
Dimension C	101mm	101mm	101mm	101mm	101mm	101mm
Dimension D	146mm	146mm	146mm	146mm	165mm	193mm
Dimension E	24.5mm	24.5mm	24.5mm	24.5mm	38mm	47.5mm
Dimension F	47.5mm	47.5mm	47.5mm	47.5mm	66mm	
Dimension G	19mm	19mm	19mm	19mm	32mm	
Crosby Shackle	G210-3.25T	G210-3.25T	G210-3.25T	G210-3.25T	G210-6.5T	G210-12T

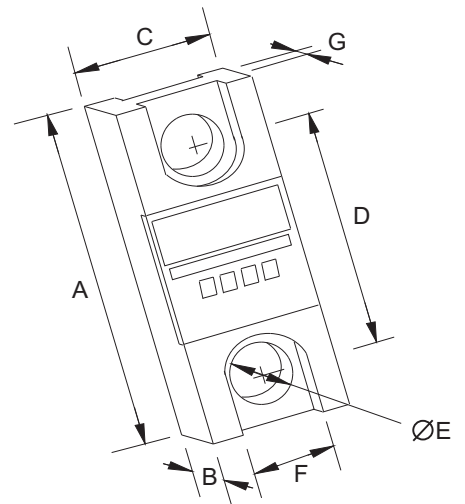

Part Number	LLP12T	LLP20T	LLP25T	LLP50T	LLP100T	LLP200T	LLP250T
Capacity	12t	20t	25t	50t	100t	200t	250t
Resolution	0.002t	0.005t	0.005t	0.01t	0.05t	0.1t	0.1t
Units	t, kg, kN, lbs	t, kg, kN, lbs	t, kg, kN, lbs	t, kg, kN	t, kN	t, kN	t, kN
Weight	3.5kg	5.2kg	5.2kg	10.9kg	37kg	80kg	80kg
Safety Factor	5:1	6:1	5:1	5:1	4:1	5:1	4:1
Protection	IP65						
Battery Type	9v PP3						
Battery Life	80hrs continuous						
Display Type	25mm LCD						
Operating Temp	-10 to 50c						
Accuracy	+/- 0.3% of applied load						
Dimension A	305mm	340mm	340mm	400mm	608mm	690mm	690mm
Dimension B	47mm	60mm	60mm	75mm	99mm	150mm	150mm
Dimension C	101mm	110mm	110mm	151mm	255mm	305mm	305mm
Dimension D	193mm	215mm	215mm	230mm	320mm	350mm	350mm
Dimension E	47.5mm	55mm	55mm	66mm	108mm	125mm	125mm
Dimension F							
Dimension G							
Crosby Shackle	G210-12T	G210-25T	G210-25T	G2140-50T	G2140-110T	G2140-200T	G2140-250T