
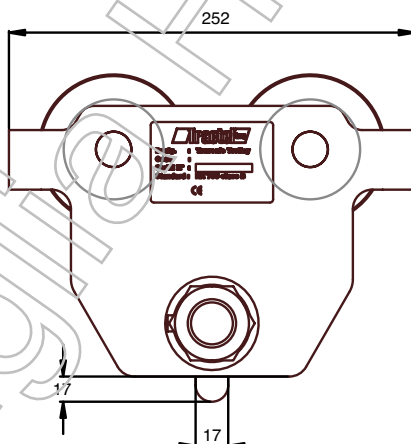
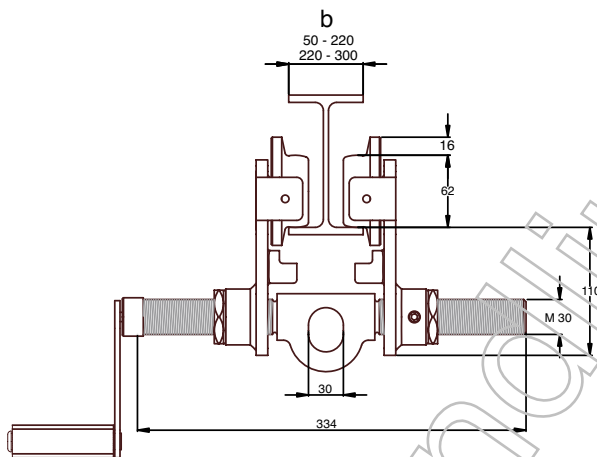


Technical Data sheet

FALL ARREST EQUIPMENT Temporary anchorage device on rollers rollbeam

ref. : T-2140 GB
rev. n° : 00
date : 13/05/2003
page : 1/1

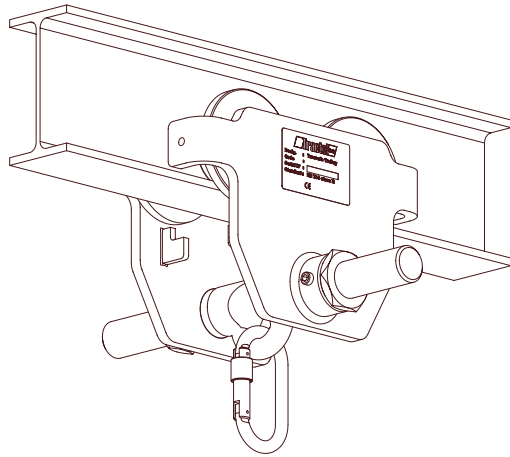

Définition

Transportable temporary anchorage point on rollers for I, H or T-shaped bars.

Function

The rollbeam is designed solely for anchoring a personal fall protection system. This device conforms to standard NF EN 795 class B (CE 0197).

Operation

- Push trolley.
- Moves along on the lower flange of the bar.
- PPE suspended (see "Permissible attachments" section).
- Installation indoors.

Design

- Rollers mounted on ball bearings.
- Anti-derailment device and safety nuts.
- Strength greater than that required by the standard.
- Rapid installation using a removable handle.

Installation

1. Horizontal bars only.
2. The bar must have an end stop at each end.
3. Installation on H, I or T-shaped bars according to the flange width:
 - standard crosspiece: $58 < b < 220\text{mm}$
 - wide crosspiece: $220 < b < 300\text{mm}$
4. Minimum bar bending radius: 1m

CE certification

APAVE No. 0082/352/160/04/03/0064

01/04/03 APAVE extension for wide crosspiece

Permissible attachments

- A connector (EN 362)
 - A fall arrest system (EN 3xx)
 - Un connector (EN 362)
 - A fall arrest harness (EN 361)
- (back or chest anchorage point)