

Anglia Handling Services Ltd.

Montgomery Way
Stratton Business Park
Biggleswade
Bedfordshire
SG18 8QB

Tel: 01767-312125

e-mail: sales@angliahandling.co.uk
www.angliahandling.co.uk



Full Member

ACCESSORIES for IMER HOISTS



[A]
Scaffold Attachment for Hoist
For better distribution of the stress on the scaffold caused by using the hoist. Equipped with plate for locking the work positioning lever.



[B]
Internal Adjustable Prop (2.45m to 3.3m)
For using the hoists indoors or where there are no external scaffolding structures; height adjustable from a min. of 2.45m to a max. of 3.3m.



[C]
External Prop for Hoists with max. capacity 200kg
To install hoists outdoors without overhanging support points; consisting of an internal adjustable prop and conversion kit with ballast container. Ballast container dimensions: W460xL2500xH415mm.



[D]
Gantries with capacity 300kg (D1) and 500kg (D2)
Suitable for all Imer Hoists. (See opposite page for dimensions)

		A	B	C
Max. capacity with extendible bracket hoist	kg	200	200	200
Max. capacity with fixed bracket hoist and swivelling extension	kg	200	200	200
Max. capacity with ext. bracket hoist and swivelling extension	kg	150	150	150
Weight	kg	18	44	85
w/l/h	mm	210/180/1950	540/540/2630	2505/1400/2630

Directors: A.Jefferies
K.J.Logue
D.Elleman



Registered in England No. 1545263
Vat Registration: 335 2809 59

Anglia Handling Services Ltd.

Montgomery Way
Stratton Business Park
Biggleswade
Bedfordshire
SG18 8QB

Tel: 01767-312125

e-mail: sales@angliahandling.co.uk
www.angliahandling.co.uk



Full Member

ACCESSORIES for IMER HOISTS

[E]

Swivelling Extensions

- For prop hoist attachment with work positioning lever.

For lifting bulky material with fixed bracket hoists, allowing the loading distance to be increased 360mm; for increasing the loading distance with extendible bracket hoists up to 1,480mm, with carrying capacity reduced to 150kg.



[F]

Hoist Trolley



Handle for hoist

Useful for transporting the scaffold hoist on the construction site. Suitable for the TR-ET-ES-ETR series.



[G1]

Two-bucket Carrier



[G2]

Four-bucket Carrier



[H]

Three-way Scaffold Frame Lifting Hook



[I]

Scaffold Clamps



[J]

Wedge-shaped Bucket 45/90/120 litres



[K]

Brick basket



		D1	D2	E	F	G1	G2	H	I	J	K
Max. capacity	kg	300	500	200	-	70	150	60	200	150/200/300	200
Weight	kg	-	-	13	8	4/8	3	3	25	12/15/19	17
Width	mm	2310	2310	90	450	340	820	65	-	400/400/460	600
Length	mm	3170	3280	680	875	810	820	360	-	450/660/780	600
Height	mm	2250	2260	275	430	450	450	410	-	300/385/430	220

Directors: A.Jefferies
K.J.Logue
D.Elleman



Registered in England No. 1545263
Vat Registration: 335 2809 59

Anglia Handling Services Ltd.

Montgomery Way
Stratton Business Park
Biggleswade
Bedfordshire
SG18 8QB

Tel: 01767-312125

e-mail: sales@angliahandling.co.uk
www.angliahandling.co.uk



Full Member



Liftable Wheelbarrow

Galvanised frame with pneumatic wheel

Body:	Hard wearing polypropylene tray. 6 cu. ft. capacity for sand and 100 liters capacity for water.
Tyres:	350x8 pneumatic wheel with inner tube in butyl
Colours available:	Yellow, red, blue, other colours are a possibility.
Frame:	Cold galvanized frame resistant to chemicals and oxidant and 30x1.5mm of thickness
Load Capacity:	KGS 200
Net Weight:	19.5 KGS

- Suitable for construction, agriculture, gardening, DIY, etc.
- It is resist high/low temperatures (-50 / +60 C°)
- It is recyclable
- Polypropylene is injected into our mould and the thickness remain consistent throughout the entire tray. The Gardenia wheelbarrow uses a ribbed tray for more strength and durability.
- Has passed certified severe crash tests.

COLOURS AVAILABLE

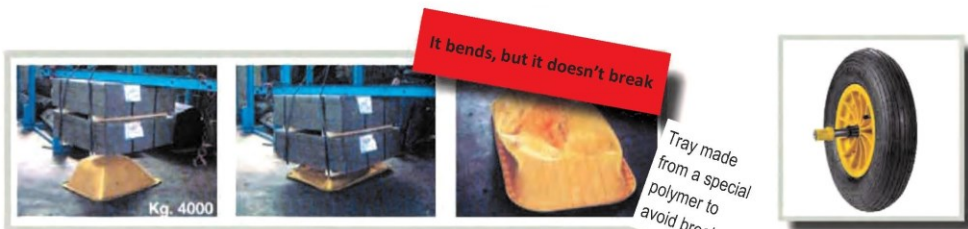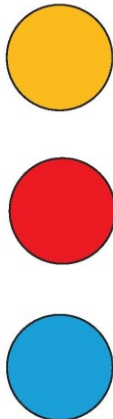

Resist
-50°C +60°C



For food use



Recyclable

Suitable for building, gardening, zootechnics and food farming application.

Directors: A.Jefferies
K.J.Logue
D.Elleman



Registered in England No. 1545263
Vat Registration: 335 2809 59