

## Type series U01

For horizontal transport of smooth, non porous loads

- > energy independent
- > automatic mode
- > plug & play, immediately ready for operation
- > lifting capacities of up to 75 kg

### Further advantages

- > simply controlled for e.g. by crane control
- > low maintenance and easy to service
- > increased safety with optical-acoustical safety unit accordingly DIN EN 13155
- > for indoor and outdoor use
- > made in Germany
- > well engineered devices with more than 40 years of experience, we are the inventor




### Examples



Picture 1



Picture 2

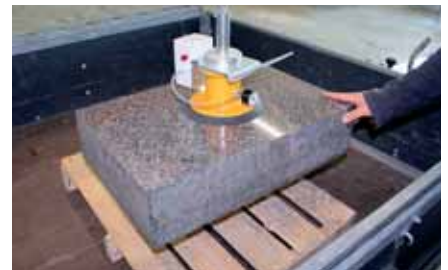


Picture 3



Picture 4

## Type series U01

### Single pad device type U01-E

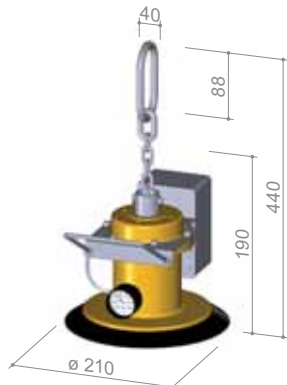

- |                    |         |                             |                  |
|--------------------|---------|-----------------------------|------------------|
| > Lifting capacity | 75 kg   | > Maximum size of the load* | 1,000 x 1,000 mm |
| > Minimum load     | 5 kg    | > Minimum size of the load  | Ø 220 mm         |
| > Dead weight      | 6.7 kg  |                             |                  |
| > Sealing ring     | U100-20 |                             |                  |

\* Important for the maximum load dimension is, that there is no bending of the load during the transport. The above-mentioned specifications refer to 2 mm steel sheets, depending on the material and thickness they can change.

### Further examples



Picture 5



Picture 6



Picture 7

**Easy Solutions For Heavy Loads.**

VACU-LIFT  
Maschinenbau GmbH

D-48282 Emsdetten  
Kuhlmannstraße 12

Tel. +49(0)25 72-93 73-0  
Fax +49(0)25 72-93 73-73

www.vaculift.de  
info@vaculift.de

**VACU LIFT**  
Vacuum Transport Systems