

Anglia Handling Services Ltd.

Montgomery Way
Stratton Business Park
Biggleswade
Bedfordshire
SG18 8QB

Tel: 01767-312125

e-mail: sales@angliahandling.co.uk
www.angliahandling.co.uk



VACULIFT


Vacuum Transport Systems



U075-E

Horizontal lifting of up to
640 kg with one suction pad.

Compact. Accurate.
No compromises.

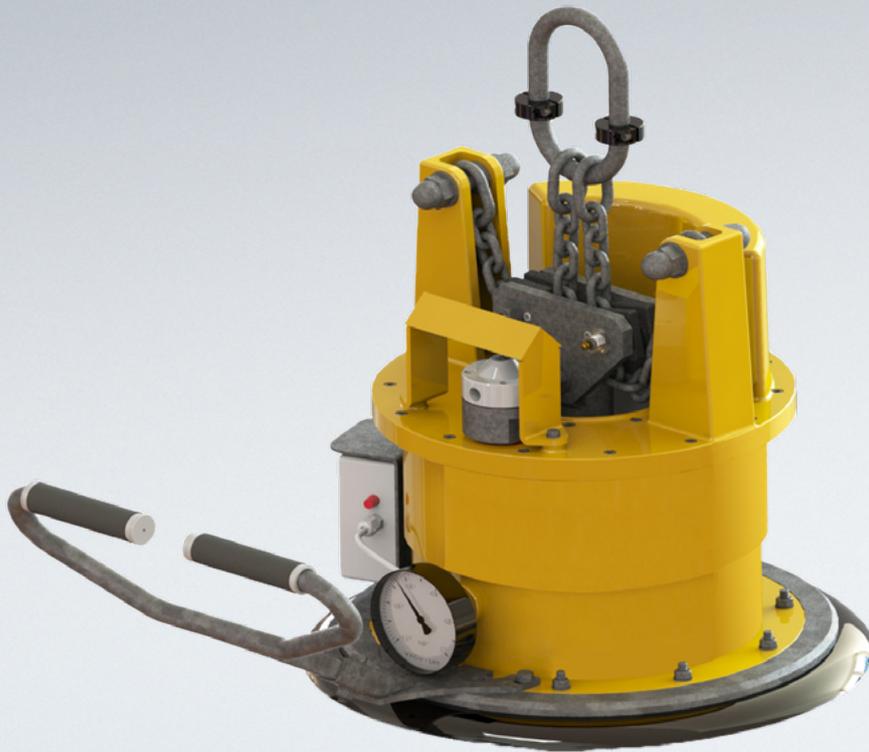

PERFORMANCE. NOTHING ELSE.

U075-E


lifting capacity / horizontal lifting



suction pad layout



load dimensions | material thickness (steel)

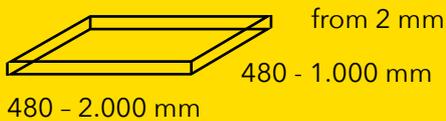

dead weight

62 kg

minimum load

35 kg

length x width x switching height

480 x 480 x 850 mm



The absolute classics among the VacuLifters - with a load capacity of up to 4,000 kg, completely based on the mechanical laws of physics: flexible and mobile, without any additional energy source.

The **U075-E** has a WLL of 640 kg. The minimum load dimension is 480 x 480 mm. The minimum load must be 35 kg.

The U075 series is the ultimate solution for energy independent lifting of goods weighing up to 750 kg - with the same ease and intuitive operation as all Green Line VacuLifters. This vacuum lifter is used where there are no compromises - neither in terms of load nor stress. The U075 vacuum lifter can be perfectly customised to the individual requirements of the application - both inside and out.

Like all Green Line models, this high-performance series is characterised by maximum sensitivity in handling the goods to be transported. The automatic switching of the vacuum during loading and unloading ensures smooth transport. To prevent scratches on sensitive surfaces, even with the heaviest loads, we use optimised suction cups and base sealing rings made of oil-resistant rubber.

Equipped with an optical-acoustic warning unit, the energy independent VacuLifter® offer even greater safety in use.

Standards of all Green Line VacuLifter®

Energy-independent

- Standard and individual solutions
- 30 year guarantee on spare parts availability
- Made in Germany

The VacuLifter® U075-E is optionally available with an Ergo-Flex manipulating handle. This can be telescoped and tilted so that the operator can handle larger loads even more ergonomically.

