


Rigging Screws

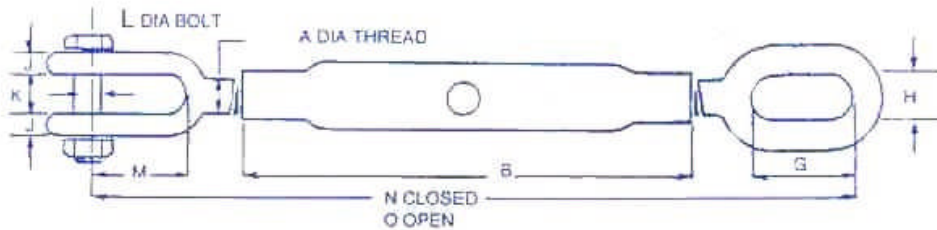

Fitting Options:


Eye / Jaw

Eye / Eye

Jaw / Jaw

WLL tons	WLL cwts	A inches	B mm	G mm	H mm	J mm	K mm	L mm	M mm	N mm	O mm
2		1/4	99	10	10	3	6	5	14	169	245
3		5/16	107	11	11	4	8	6	16	185	287
7.5		3/8	153	25	11	8	12	8	27	240	350
10		1/2	229	33	13	9	14	10	33	355	530
15		5/8	229	39	18	9	22	13	48	375	545
22		3/4	229	48	22	11	23	16	50	395	545
32		7/8	305	49	24	13	28	19	58	470	683
42		1	356	49	24	14	32	22	60	550	788
2	15	1. 1/8	356	56	28	14	32	22	75	560	793
3	15	1. 1/4	380	68	34	19	37	25	80	625	863
5	2	1. 1/2	405	75	39	19	49	33	85	670	918
7	0	1. 3/4	405	85	40	25	49	36	110	700	913
9	5	2	405	100	45	25	58	42	125	755	988

Straining Screws Commercial Pattern

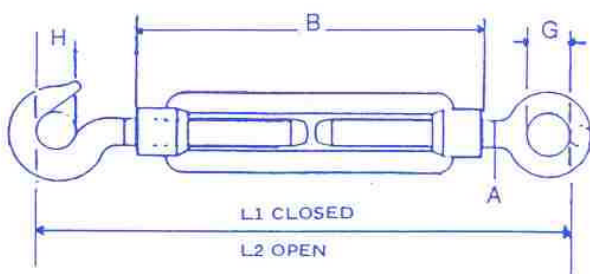

A Ø mm	B mm	L1 mm	L2 mm	G mm	H mm
6	110	151	237	9	8
8	110	161	241	10	10.5
10	125	201	290	14	13
12	125	216	299	16	16
14	140	232	322	18	18
16	170	278	394	22	20
20	200	317	449	24	21
22	220	364	509	27	24
24	255	396	573	27	26

▪ Also available in Stainless Steel – see page 81.