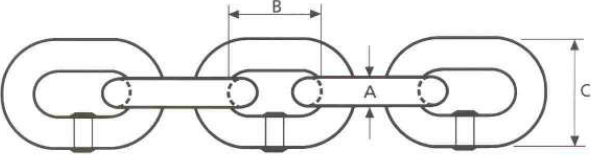



Short Link Chain

Mild steel, commercial quality short link chain. Not to be used for lifting applications!

	A (mm)	B (mm)	C (mm)	MBL (kg)	Weight/M (kg)
	5.0	19.0	17.0	1250	0.50
	6.3	18.0	20.0	1600	0.75
	8.0	24.0	26.0	3200	1.35
	10.0	30.0	34.0	5000	1.85
	12.7	36.0	44.0	8000	3.80
	16.0	45.0	54.0	12500	5.80
	20.0	56.0	67.0	20000	9.00

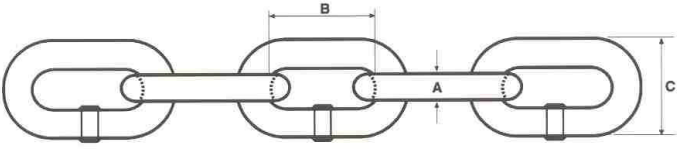
Long Link Chain

Mild steel, commercial quality long link chain. Not to be used for lifting applications!

	A (mm)	B (mm)	C (mm)	MBL (mm)	Weight/M (kg)
	5.0	25	21	1000	0.53
	7.0	38	29	1250	0.63
	8.0	50	33	2500	1.08
	10.0	50	38	4000	1.57
	12.7	66	48	6300	2.95
	16.0	100	60	10000	4.45
	20.0	125	75	16000	7.00

Straight Link Chain

Welded mild steel, commercial quality straight link chain. Supplied in reels only.

	A (mm)	B (mm)	C (mm)	Weight/Reel (kg)
	2.5	14	12	8.20
	2.5	19	12	6.90
	3	16	14	11.40
	3	21	14	10.60
	3	26	14	9.00
	4	19	17	10.40
	4	26	17	9.50
	5	21	21	13.30
	5	28	21	12.50
	6	24	25	15.70
	6	33	25	14.30
	6	42	25	13.60