

# Anglia Handling Services

**pecolift**  
3.5m Non-Powered, Powered Access

**ecolift**  
4.2m Non-Powered, Powered Access



**BATTERY FREE  
POWER FREE  
OIL FREE  
EASY! FAST! SAFE!  
AWARD WINNING**



Step in...



Simply turn the handle...



...3.5m working height in 11 seconds.



Can be specified with ATEX approval for Zones 1 and 21.

01767 312125

sales@angliahandling.co.uk

www.angliahandling.co.uk

# pecolift

3.5m Non-Powered, Powered Access

## OPERATING SPECIFICATIONS - Pecolift

Working Dimensions	Standard	Wind Rated
Maximum working height:	3.50 m	
Maximum platform height:	1.50 m	
Basket dimensions:	0.72 m (L) x 0.60 m (W)	1.10m x 1.10m
Working footprint:	0.98 m x 0.70 m	
Safe working load:	150 kg (1 person + tools)	
Maximum manual force:	200 N	
Maximum gradient for operation:	0 degrees	3°
Maximum wind force:	Internal use only, 0 (zero) mph	Internal/External Use, 28mph, 195 kg (1.91kN)
Maximum wheel force:	125 kg	
Maximum castor point load:	125 kg (1.23 kN)	195 kg (1.91kN)
Sound pressure level:	Less than 70DBa	

### Closed Dimensions

Length:	0.98 m	1.10 m
Width:	0.70 m	1.10 m
Height:	1.55 m	1.55 m
Weight:	180 kg	240 kg


### Lift Cycles

Unlimited

Unlimited



3.5m

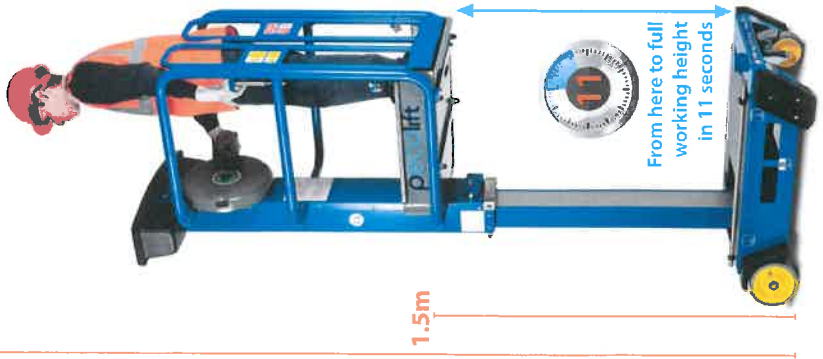

1.5m

**WIND RATED**  
Available as an option to the standard machine, Pecolift Wind Rated is operable on gradients up to 3° and in winds up to 28mph.



# ecolift

4.2m Non-Powered, Powered Access

## OPERATING SPECIFICATIONS - Ecolift

Working Dimensions	Standard	Wind Rated
Maximum working height:	4.20 m	
Maximum platform height:	2.20 m	
Basket dimensions:	850 mm (L) x 644 mm (W)	1.28 m x 700 m
Working footprint:	1.28 m x 700 m	1.28m x 950mm
Safe working load:	150 kg (1 person + tools)	
Maximum manual force:	200 N	
Maximum gradient for operation:	0 degrees	3°
Maximum wind force:	Internal use only, 0 (zero) mph	Internal/External Use, 28mph, 245 kg
Maximum wheel force:	234 kg	245 kg
Maximum castor point load:	234 kg (2.29 kN)	245 kg (2.4kN)
Sound pressure level:	Less than 70DBa	

### Closed Dimensions

Length:	1.28 m	1.28 m
Width:	0.70 m	0.95 m
Height:	1.94 m	1.94 m
Weight:	305 kg	335 kg


### Lift Cycles

Unlimited

Unlimited




4.2m

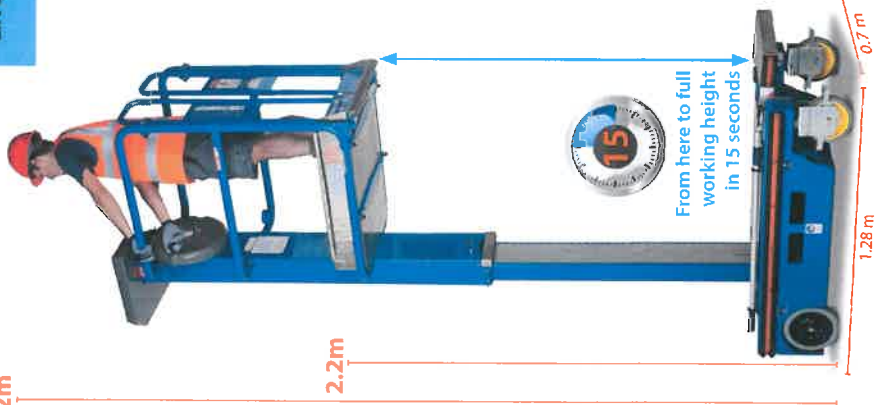

2.2m

**WIND RATED**  
Available as an option to the standard machine, Ecolift Wind Rated is operable on gradients up to 3° and in winds up to 28mph.

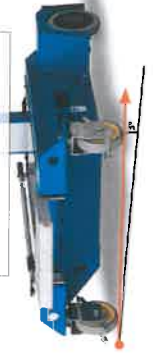

# work smart

...IT PAYS TO SPECIFY POWER TOWERS



01767 312125



sales@angliahandling.co.uk



www.angliahandling.co.uk

## Non-powered Powered Access! ...a major step change in low-level access.

It's so easy, fast and efficient to use, it's intuitive. Just step in and turn the handle! And you don't need power; no batteries to charge or mains power consumption. We call it 'Non-Powered, Powered Access!'©

Gone are the days of climbing steps or podiums, no more slips, trips or having to balance!

Stop wherever you want up to 4.2m working height.

You're always safe, fully guarded from the ground up. And its low maintenance, in fact it's virtually maintenance free, it's so simple!

- Step into the platform, no climbing.
- Intuitive to operate - turn handle to elevate. Patented\* lift mechanism, no power required.
- 'Auto-lok' brake on elevation.
- Lightweight, easy to manoeuvre.
- Small footprint
- Unlimited lift cycles, can be used 24/7.
- Robust design for years of trouble free service.
- Minimal operational costs, virtually maintenance free.



## Anglia Handling Services Ltd.

Montgomery Way  
Stratton Business Park  
Biggleswade  
Bedfordshire  
SG18 8QB

Tel: +44 (0) 1767 312125  
Fax: +44 (0) 1767 601375

sales@angliahandling.co.uk  
www.angliahandling.co.uk

Biggleswade