

Yale®

Hand chain hoist

Yalelift IT



Illustrated rubber buffers
optionally available!

Hand chain hoist
with integrated
push type trolley
model *Yalelift ITP*

Capacities 500 - 5.000 kg

Hand chain hoist
with integrated
geared type trolley
model *Yalelift ITG*


Capacities 500 - 5.000 kg

The combination of the *Yalelift 360* with a low headroom manual trolley provides even more flexibility in the application of the *Yalelift 360*.

- All units of this series up to a capacity of 3.000 kg are provided with single chain fall and the min. headroom (Dim. A) has been further reduced. Ideal for applications with low ceilings and limited headroom.
- The manual trolleys are adjustable to fit a wide range of beam profiles (e.g. INP, IPE, IPB). Depending on the beam flange width an adjustment up to 300 mm can be made easily.
- The trolley wheels are designed for a max. beam profile incline of 14 % (DIN 1025 - part 1), excellent rolling features are guaranteed by pre-lubricated, encapsulated ball bearings.
- Anti-tilt and anti-drop devices are standard.
- A subsequent conversion of a *Yalelift 360* into a *Yalelift IT* with integrated trolley is easily possible at any time.

Optional equipment and accessories
are given on pages 22 and 23!

Corrosion resistance CR Accessories

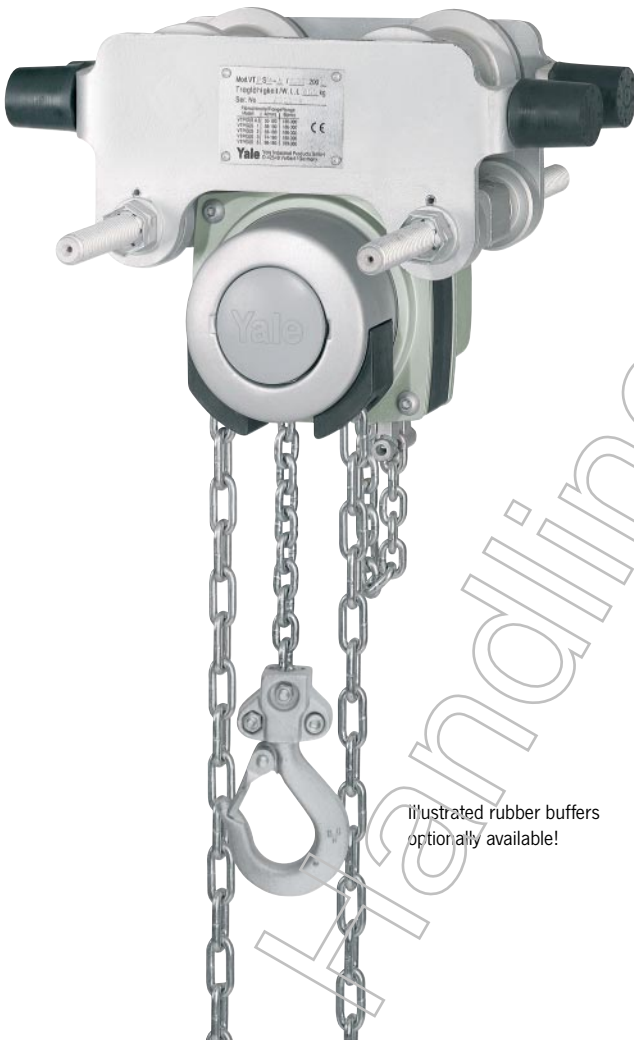

Illustrated rubber buffers optionally available!

Corrosion resistance CR

Added lifetime

All models of the Yalelift Vario programme can be supplied with corrosion resistant features which include zinc-plated load chains and stainless steel hand chain as standard.

Corrosion protection

Corrosion starts on the surface of components due to reaction of environmental influences. This affects the mechanical properties of the components, e.g. breaking strength and total ultimate elongation. Many components are supplied in black (unmachined), bright (machined) or painted condition. This offers certain protection but after only a short period of time corrosion can begin.

With the application of a protective coating, the development of corrosion can be reduced and delayed, thus extending the service life of the treated components.

Applications for corrosion resistant units and zinc-plated resp. stainless steel load chains

Completely corrosion resistant units with either zinc-plated or stainless steel load chains should be used in all conditions with increased requirements towards corrosion protection.

Typical applications are in food processing (e.g. dairy, abattoir, etc.), chemical industries (e.g. paper, dye industries), farming and sewage treatment.

All units available in corrosion resistant version!

Spark resistant features

Added safety

All models of the Yalelift Vario programme can be provided with the following optional features for additional protection against sparking:

- Load and hand chains from stainless steel
- Units completely corrosion resistant
- Bronze-plated suspension and load hooks
- Solid bronze trolley wheels
- Rubber buffers
- Chain containers



Solid bronze trolley wheels



Bronze-plated suspension and load hooks

Overload protection

Added control

The overload protection device of the Yalelift Vario programme reliably prevents excessive load take-up of the hoist during operation. When reaching the pre-set overload value, the unit will jam and stop operation in the lifting direction. Lowering of the load is still possible at any time.

The overload protection device provides additional safety with regard to possible false estimation of the load weight and thus increases the lifetime of the hoist. The new design principle allows excellent adjustability and response.



Spark resistance

In nearly all industrial areas, and not only in the chemical industry, plants are operated in explosion endangered environments. Because of the great damage an explosion could cause to people and material, stringent legal and technical requirements are imposed, particularly on electrical equipment used in explosion endangered environments.

Applications

Paint factories, paint shops, foundries, on-/offshore, refineries, oil depots, electro-plating, automobile factories, on ships and docks, printers, textile and paper factories, food industries, glass and ceramic industries, wood working industries and hardening shops, etc.

Beam locking device

Added security

Yale trolleys can be optionally provided with beam locking device to secure the unloaded trolley in fixed position on the beam (park position e.g. on ships).

Chain container

Added comfort

The chain containers for the Yalelift Vario programme consist of a robust, powder-coated steel frame with a flexible chain bag made from high tensile Cordura textile fabric. Available in different sizes. Special sizes on request.




Hand chain hoist

Yalelift 360


Model	Capacity in kg/ Number of chain falls	Chain dimensions d x p in mm	Hand chain overhaul for 1 m lift m	Pull on hand chain at WLL daN	Net weight at std. lift (3 m) kg
Yalelift 360	500/1	5 x 15	30	21	9
	1000/1	6 x 18	49	30	13
	2000/1	8 x 24	71	32	20
	3000/1	10 x 30	87	38	29
	5000/2	10 x 30	174	34	38
	10000/3	10 x 30	261	44	71
	20000/6	10 x 30	522	2 x 44	196
Towerlift	1000/1	6 x 18	49	30	14
	2000/1	8 x 24	71	32	21
Towerlift ES	1000/1	6 x 18	49	30	15




Model	Capacity in kg/ Number of chain falls	Beam range	Beam flange width b mm	Beam flange thickness t max. mm	Min. radius curve m	Net weight in kg for 3 m lift with locking device			
						-P	-G	-P	-G
Yalelift IT	500/1	A	50 - 180	19	0,90	20	24	26	31
	500/1	B	180 - 300	19	0,90	21	25	27	32
	1000/1	A	50 - 180	19	0,90	27	32	35	40
	1000/1	B	180 - 300	19	0,90	29	33	37	41
	2000/1	A	58 - 180	19	1,15	44	49	52	57
	2000/1	B	180 - 300	19	1,15	46	50	54	58
	3000/1	A	74 - 180	27	1,40	77	82	86	91
	3000/1	B	180 - 300	27	1,40	79	84	88	93
	5000/2	A	98 - 180	27	1,80	125	130	135	140
	5000/2	B	180 - 300	27	1,80	129	134	139	144
Yalelift LH	500/1	A	60 - 180	19	0,90	27	31	33	38
	500/1	B	180 - 300	19	0,90	27	32	34	38
	1000/1	A	70 - 180	19	0,90	35	40	43	48
	1000/1	B	180 - 300	19	0,90	36	41	44	49
	2000/1	A	82 - 180	19	1,15	61	65	69	73
	2000/1	B	180 - 300	19	1,15	62	67	70	75
	3000/1	A	100 - 180	19	1,40	107	112	116	121
	3000/1	B	180 - 300	19	1,40	109	114	118	123
	5000/2	A	110 - 180	27	1,80	152	157	162	167
	5000/2	B	180 - 300	27	1,80	156	161	166	171
	10000/3	B	125 - 310	40	1,80				on request

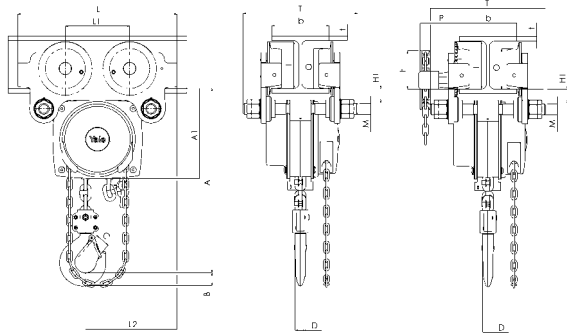


Yalelift ITP/G 0,5t - 3,0t



Yalelift ITG

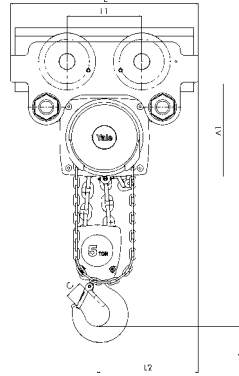


Yalelift ITP/G 5,0t


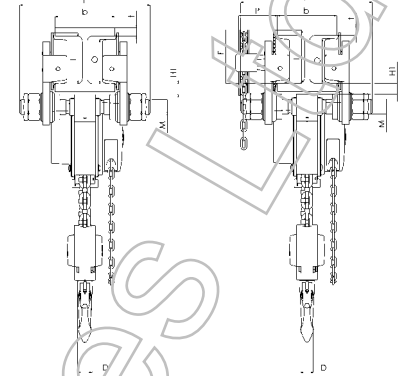


Yalelift ITG



Dimensions in mm	Yalelift IT 500	Yalelift IT 1000	Yalelift IT 2000	Yalelift IT 3000	Yalelift IT 5000	Yalelift LH 500	Yalelift LH 1000	Yalelift LH 2000	Yalelift LH 3000	Yalelift LH 5000
A _{min.}	245	272	323	382	550	188	211	264	316	425
A ₁	158	178	205,5	252	260,5	223	250	289	346	345
A ₂	-	-	-	-	-	381	427	511	614	612
B	17	22	30	38	45	17	22	30	38	45
C	24	29	35	40	47	24	29	35	40	47
D	14	19	22	30	37	14	19	22	30	37
F (geared)	92	92	91	107	149,5	92	92	91	107	150
H ₁	24,5	24	23,5	32	30,5	24	24	24	32	31
I (pushed)	71,5	71,5	95,5	131	142,5	72	72	96	131	143
I (geared)	76,5	76,5	98	132,5	148,5	77	77	98	133	149
L	270	310	360	445	525	270	310	360	445	525
L ₁	130	130	150	180	209	130	130	150	180	209
L ₂	159	175	207	256	283	444	488	582	690	720
L ₃	-	-	-	-	-	124	135	172	203	175
L ₄	-	-	-	-	-	184	201	230	265	283
M	M 18	M 22	M 27	M 30	M 42	M 18	M 22	M 27	M 30	M 42
O	60	60	80	112	125	60	60	80	112	125
P (geared)	108	110	112	112	117	108	110	112	112	117
T (Range A)	280	290	305	320	364	280	290	305	320	364
T (Range B)	400	410	425	440	484	400	410	425	440	484





Yalelift LHP 0,5t - 3,0t



Yalelift LHG 0,5t - 3,0t



Yalelift LHP 5,0t



Yalelift LHG 5,0t

