



Sheet Pile Clamp



Engage lock by pulling rope downwards and the clamp opens.

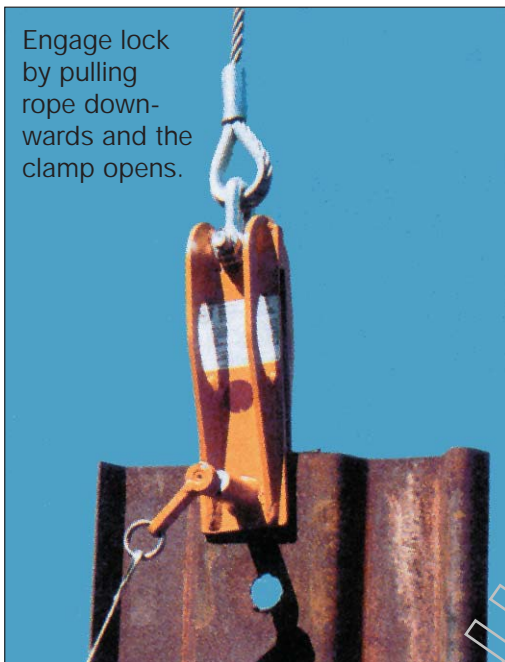

The clamp will lock automatically as soon as the locking pin engages the hole.

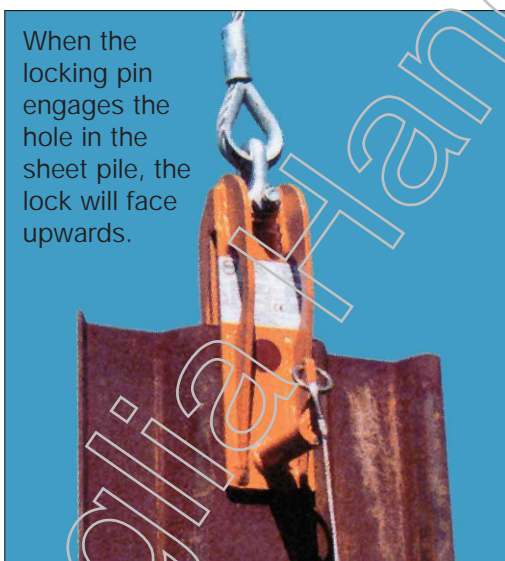

When the locking pin engages the hole in the sheet pile, the lock will face upwards.

The clamp for the handling of sheet piles. Automatic opening and locking.

Full assembly with suspension eye, rope, shackle and pulling rope.

Order No.	Model	Pulling Force	For Sheet Piles	Sheet Pile Thickness	Weight
123 100	LZ-1,0	1.000 kg	CE/CR440 or similar	4 mm	4 kg
123 300	DZ-3,0	3.000 kg	KD VI-8 D 27909 or similar	8 mm	15 kg

For The Safe Handling Of Sheet Piles

Anglo-Technologies