


Anglia Handling Services Ltd.

L4 Lever Hoist Specifications

- 1 Proof Load to 1.5 x S.W.L.
- Heavy Duty Forged Safety Catches
- Light Load of 2% of S.W.L.
- Hook housing is bolt connected using cap head screws and nyloc nut
- Brake Lock Out Test of between 5% - 7% of the S.W.L.
- All external nuts are nyloc type
- Endurance Testing Regime EN 13157 1500 cycles European
- Meets European Standard Machinery Directive and CE marked
- Conforms to EN13157 requirements
- Load Chain meets the requirements of European and Japanese standards
- Twin Load Chain Guides direct the Load Chain onto the Load Sheave when used in all orientations
- Light weight for easy handling
- Twin Pawls as standard
- All hoist components corrosion protected

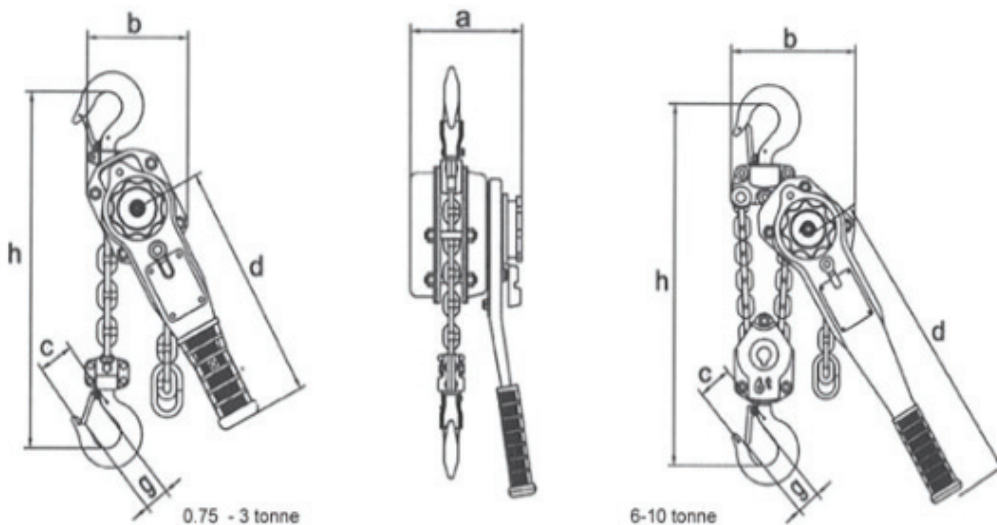

TECHNICAL SPECIFICATION

Part Code	Capacity (tonne)	a mm	b mm	c mm	d mm	g mm	h mm	Load Chain Size(mm)	Load Chain No.of-Falls	Mass Kg	Extra Weight Per Mtr (Kg)
033.075	0.75	148	121	37.5	265	28	280	5.6 x 17	1	6.2	0.7
033.150	1.5	165.5	141	47	415	33.5	350	7.1 x 21	1	9.6	1.1
033.300	3.0	194.5	178	62.5	415	43.5	420	10.0 x 30	1	15.5	1.7
033.600	6.0	194.5	228	78	415	51	570	10.0 x 30	2	27	3.5
033.900	9.0	194.5	310	-	415	64	680	10.0 x 30	3	38.3	5.2

Tel: +44 (0) 1767 312125 Fax: +44 (0) 1767 601375

E-mail: sales@angliahandling.co.uk