



Rigging Screws *Closed Body*

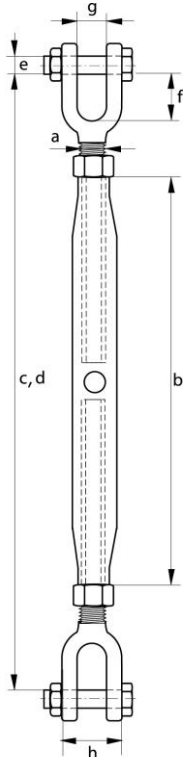

a (mm)	WLL (tonnes)	b (mm)	c (mm)	d (mm)	e (mm)	f (mm)	g (mm)	h (mm)
6	0.20	100	175	255	5	19	7	20
8	0.32	108	199	282	6	25	9	24
10	0.50	125	222	320	8	26	10.5	28
12	0.70	195	320	479	10	32	13	34
16	1.20	230	388	572	12	39	18	42
20	1.50	270	454	672	16	46	20	51
22	2.20	295	490	730	20	55	25	55
24	3.20	325	558	819	22	63	30	70
33	4.80	370	681	977	30	85	38	82
39	6.00	400	710	1017	33	86	45	85
45	8.50	407	810	1170	39	86	48	96
48	10.00	407	855	1215	45	98	50	101

Options: Jaw / Jaw, Eye / Jaw, Eye / Eye
 Material: Mild steel
 Finish: Hot dip galvanised
 Note: End fittings of 6 and 8 mm screws are electro galvanised

Straining Screws *Commercial Pattern*

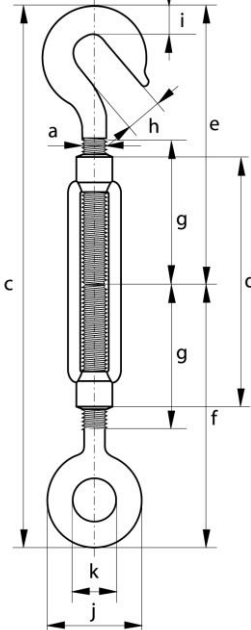

a (mm)	b (mm)	c mm	d mm	e mm	f (mm)	g (mm)	h (mm)	i (mm)	j (mm)	k (mm)
6	172	258	110	77	80	55	8	8	20	9
8	184	264	110	85	84	57	10.5	10	22	10
10	222	311	125	106	105	68	13	11	31	14
12	241	324	125	117	111	70	16	13	35	16
16	311	427	170	144	150	88	20	17	47	22
20	358	490	200	170	167	105	21	21	52	24
24	453	630	255	215	205	135	26	33	65	27
30	495	660	255	240	220	135	34	35	71	31
33	545	744	295	260	245	148	38	40	88	36
36	597	782	295	275	277	158	46	45	94	38

Material: Drop forged mild steel
 Standard: DIN 1480
 Finish: Electro galvanised