



ATEX


ATEX Hand Chain Hoist c/w Stainless Steel Hand Chain

	Capacity (kg)	Falls of Chain	Closed Headroom Hook to Hook	Hook Opening	Temp Range	Mass (3 m) (kg)
	500	1	280 mm	27.5 mm	-20°C to +135°C	8.1
	1000	1	306 mm	31.5 mm	-20°C to +135°C	11.5
	2000	1	445 mm	36.5 mm	-20°C to +135°C	16.8
	3200	2	520 mm	42.5 mm	-20°C to +135°C	38.4
5000	2	600 mm	51.0 mm	-20°C to +135°C	39.8	


ATEX Lever Hoists

	Capacity (kg)	Falls of Chain	Closed Headroom Hook to Hook	Hook Opening	Temp Range	Mass (1.5 m) (kg)
	800	1	280 mm	28.0 mm	-20°C to +135°C	6.2
	1600	1	350 mm	33.0 mm	-20°C to +135°C	9.6
	3200	1	420 mm	42.5 mm	-20°C to +135°C	15.5
	6300	2	570 mm	51.0 mm	-20°C to +135°C	27.0
10000	3	680 mm	56.0 mm	-20°C to +135°C	38.3	

Ex II 2 GD c IIC T4 IIIC T135°C

	II	Equipment Group: surface industries
	2	Category: High Safety
	GD	Ex Atmosphere: Gas and Dust
	c	Protection type: Design safety
	IIC	Gas Explosion Group: Protected for group IIC which includes groups IIA & IIB
	T4	Gas Temperature Class: Maximum external surface temperature 135°C
	IIIC	Groups of Dust: Protected for group IIIC which includes groups IIIA & IIIB
	T135°C	Dust Temperature Class: Maximum external surface temperature 135°C

Low Headroom Hand Chain Hoist & Trolley

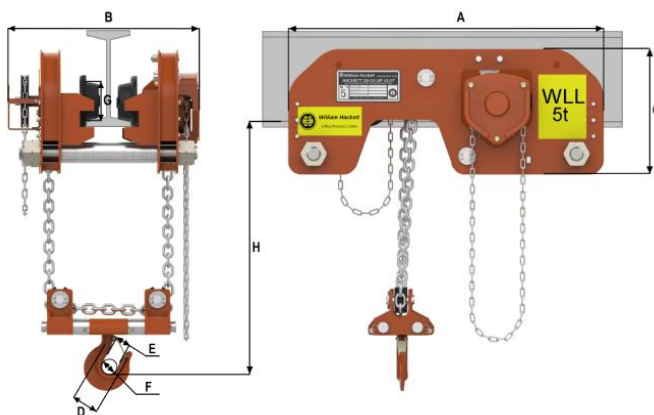

Capacity (kg)	Falls of Chain	Closed Headroom H (mm)	A (mm)	B	C	E	F	Mass (3 m) Kg
1.0	2	280	630	384 - 502	270	32 +/- 1	40	68.5
3.2	2	445	830	490 - 540	330	62.5 +/- 1.5	52	131
5.0	2	520	980	550 - 600	385	78 +/- 1.5	60	195
10.0	2	600	1180	570 - 620	440	90 +/- 2	85	338