

Demag Balancer

Available in capacities of 125 and 250 kg.



The Demag Balancer uses a standard variable speed electric chain hoist in conjunction with weight sensing and an intuitive control for precise positioning using light manual input only.

The weight of the load is 'balanced' so it can be controlled very easily with the D-Grip Servo control handle and by switching over to 'Load Positioning Mode' the operator can grasp and guide the load directly with light pressure.


A high level of safety is assured for assembly operators because any oscillation and uncontrolled load movements are suppressed.

Load handling attachments can be lifted in conjunction with the load.

Special Hoists


We offer a range of additional features and hoists to suit special applications.

Low Headroom Hoists



The hoist load hook is situated to one side of the hoist body to offer an increased height of lift.

Multiple Lift Hoists

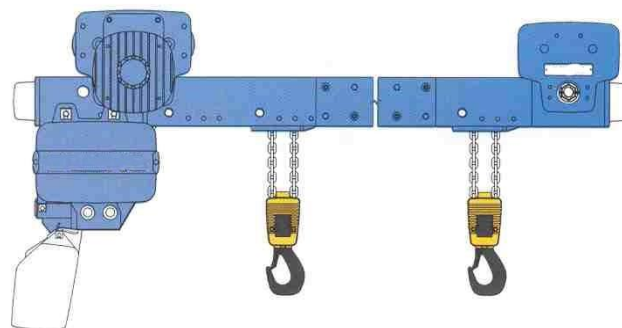

Hoists can be fitted with two or four load chains lifting and lowering simultaneously to ensure the load is stable and lifted horizontally.

Other Options:

- Thoraxal paint for acid resistance
- Stainless steel load chain
- Foundry duty load chain
- Heat shields