


Powered Vacuum Lifting Beams

Powered vacuum lifting beams are a cost-effective way to lift, turn and rotate (if required) a variety of products including **Steel, Wood, Plastic, Glass and Stone**. Our vacuum lifting beams can be supplied with single or multiple adjustable suction pads to suit the product, some of which can be switched off by lever valve if required – mains or battery powered.

We can also offer a range of adjustable work stands using vacuum power to secure the load.

All devices are fitted with rubber sealing rings with the quality of rubber designed for normal lifting conditions.

- ❖ Standard oil resistant - **BLACK**
- ❖ Heat resistant - **RED**

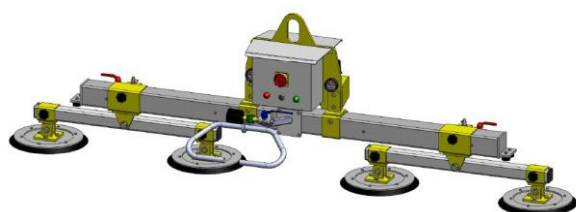

Type	Pads	Model	Capacity	Max. Sheet Size	Suction Pads	Unit Weight
	1	H-E-150	150	1000 x 1000 mm (1 mm)	1 @ 270 mm	64 kg
		H-E-300	300	1000 x 1000 mm (1 mm)	1 @ 360 mm	72 kg
		H-E-500	500	1000 x 1000 mm (1 mm)	1 @ 495 mm	81 kg
		H-E-750	750	1000 x 1000 mm (1 mm)	1 @ 650 mm	111 kg
		H-E-1000	1000	1000 x 1000 mm (1 mm)	1 @ 650 mm	111 kg
		H-E-1250	1250	1000 x 1000 mm (1 mm)	1 @ 900 mm	154 kg
	2	H-2-150	150	3000 x 1500 mm (2 mm)	2 @ 170 mm	80 kg
		H-2-300	300	3000 x 1500 mm (2 mm)	2 @ 315 mm	85 kg
		H-2-500	500	3000 x 1500 mm (2 mm)	2 @ 340 mm	90 kg
		H-2-750	750	3000 x 1500 mm (2 mm)	2 @ 495 mm	130 kg
		H-2-1000	1000	3000 x 1500 mm (2 mm)	2 @ 495 mm	130 kg
		H-2-1250	1250	3000 x 1500 mm (2 mm)	2 @ 650 mm	184 kg
	4	H-4Q-150	150	2500 x 1250 mm (2 mm)	4 @ 180 mm	100 kg
		H-4Q-300	300	2500 x 1250 mm (2 mm)	4 @ 270 mm	87 kg
		H-4Q-500	500	2500 x 1250 mm (2 mm)	4 @ 270 mm	111 kg
		H-4Q-750	750	2500 x 1250 mm (2 mm)	4 @ 315 mm	148 kg
		H-4Q-1000	1000	2500 x 1250 mm (2 mm)	4 @ 340 mm	160 kg
		H-4Q-1250	1250	2500 x 1250 mm (2 mm)	4 @ 495 mm	244 kg
	4	H-4K-300	300	4000 x 2000 mm (2 mm)	4 @ 375 mm	160 kg
		H-4K-500	500	4000 x 2000 mm (2 mm)	4 @ 375 mm	170 kg
		H-4K-750	750	4000 x 2000 mm (2 mm)	4 @ 375 mm	180 kg
		H-4K-1000	1000	4000 x 2000 mm (2 mm)	4 @ 375 mm	185 kg
		H-4K-1250	1250	4000 x 2000 mm (2 mm)	4 @ 495 mm	215 kg
			6	H-6Q-150	150	3000 x 1500 mm (1 mm)
H-6Q-300	300			3000 x 1500 mm (1 mm)	6 @ 170 mm	112 kg
H-6Q-500	500			3000 x 1500 mm (1 mm)	6 @ 210 mm	128 kg
H-6Q-750	750			3000 x 1500 mm (1 mm)	6 @ 300 mm	140 kg
H-6Q-1000	1000			3000 x 1500 mm (1 mm)	6 @ 315 mm	190 kg
H-6Q-1250	1250			3000 x 1500 mm (1 mm)	6 @ 340 mm	212 kg
	8	H-8Q-150	150	4000 x 2000 mm (1 mm)	8 @ 140 mm	110 kg
		H-8Q-300	300	4000 x 2000 mm (1 mm)	8 @ 140 mm	130 kg
		H-8Q-500	500	4000 x 2000 mm (1 mm)	8 @ 210 mm	158 kg
		H-8Q-750	750	4000 x 2000 mm (1 mm)	8 @ 210 mm	180 kg
		H-8Q-1000	1000	4000 x 2000 mm (1 mm)	8 @ 270 mm	210 kg
		H-8Q-1250	1250	4000 x 2000 mm (1 mm)	8 @ 315 mm	260 kg

Options Available:

- 90° and 180° rotation
- resting trestles
- weld-on hooks
- manual and powered rotation
- foldable beams
- chain suspension
- coil handling design
- safety webbings
- cable remote control