


## Mini Weighers

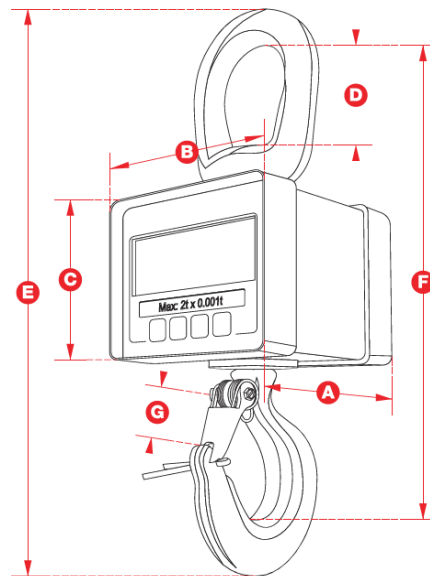

<input type="checkbox"/> Tare <input type="checkbox"/> Peak hold <input type="checkbox"/> Pre-set tare	<input type="checkbox"/> Audible setpoint alarm <input type="checkbox"/> Overload counter <input type="checkbox"/> Supplied with aluminium flight case
--	--

Maximum Load (kg)	100	250	500	1000	2000	5000
Resolution (kg)	0.05	0.1	0.2	0.5	1	1
Units	t, kg, kN and lbs					
Weight of Unit (kg)	1.5	1.5	1.5	1.5	3.1	8.7
Safety Factor	10:1	5:1	5:1	5:1	5:1	5:1
Battery	9V PP3					
Battery Life	80 hours continuous					
Display Height	25 mm LCD					
Operating Temperature	-10°C to +50°C					
Accuracy (+/- kg)	+/- 0.3% of applied load					
Protection	IP65					
Battery Life (hours)	80	80	80	80	80	80
Display Height (mm)	25	25	25	25	25	25
Dimension A (mm)	82	82	82	82	117	136
Dimension B (mm)	113	113	113	113	112	112
Dimension C (mm)	81	81	81	81	92	92
Dimension D (mm)	50	50	50	50	64	98
Dimension E (mm)	240	240	240	240	320	444
Dimension F (mm)	208	208	208	208	271	365
Dimension G (mm)	22	22	22	22	28	42

Larger capacities available, please contact us for details