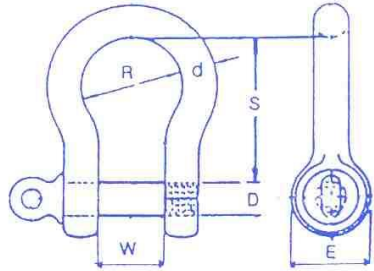
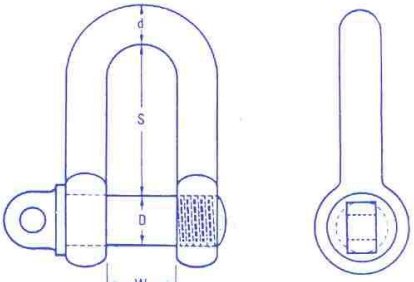


## Shackles – Stainless Steel


### Stainless Steel High Tensile Bow Shackles

	WLL (tonnes)	d (mm)	D (mm)	W (mm)	S (mm)	R (mm)	Weight (kg)
	0.8	8	10	16	32	24	0.09
	1.5	10	12.7	20	40	30	0.16
	2.5	12.7	16	25	50	38	0.37
	4.0	16	19	32	64	48	0.58
	5.5	19	22.2	38	76	57	1.05
	7.5	22.2	25.4	44	88	66	2.00
	9.0	25.4	28.6	51	102	76	3.05

### Stainless Steel High Tensile Dee Shackles

	SWL (tonne)	d (mm)	D (mm)	W (mm)	S (mm)	Weight (kg)
	1	8	10	16	32	0.1
	2	10	12.7	20	40	0.2
	3	12.7	16	25	50	0.4
	5	16	19	32	64	0.7
	7	19	22	38	76	0.9
	9	22.2	25	44	88	1.4
	11	25.4	28.6	51	102	2.2
	13	28.6	31.8	57	114	2.9
	15	31.8	34.9	64	128	4.1
	18	34.9	38	70	140	6.2

### Stainless Steel Long Dee Shackles

	d (mm)	D (mm)	W (mm)	E (mm)	S (mm)	Weight (kg)
	4	4	8	8	30	0.01
	5	5	10	10	37	0.02
	6	6	12	12	45	0.04
	8	8	16	16	60	0.09
	10	10	20	20	75	0.20
	12	12	24	24	90	0.32

### Stainless Steel Bow Shackles (Dee shackles also available)

	d (mm)	D (mm)	W (mm)	R (mm)	E (mm)	S (mm)	Weight (kg)
	5	5	10	17	10	22	1.7
	6	6	12	21	12	27	2.8
	8	8	16	28	16	32	6.4
	10	10	20	34	20	46	13.5
	12	12	24	42	24	55	22.9
	16	16	32	53	32	65	47.2
	20	20	40	65	40	76	108.3